

LTT

Liquid Photopolymer

The Total Solution for Thin Plate Corrugated Printing

MacDermid LTT liquid photopolymer is a 32 durometer (Shore A) resin designed specifically to provide thin photopolymer printing plates for the corrugated market.

Our LTT resin offers tack-free properties, excellent solids coverage and high resilience for lint-free printing. MacDermid LTT resins are dyed red to improve the contrast so that mounting is easier and provides for easy cleanup on press, saving you precious time and money.


For corrugated printing that needs to be handled just right, count on the company that innovates with you in mind. MacDermid.

Key Features

- Extremely low tack plate provides clean performance on press
- Excellent durability with UV, heat, and humidity stability
- Wide imaging latitude easily images a variety of copy, including fine detail
- Highly resilient plate with exceptional ink transfer
- Option to cap for reduced fluting
- Well suited for in-position platemaking
- Ability to reclaim resin and use soap and water washout results in a high quality, sustainable plate.

Segments

Corrugated

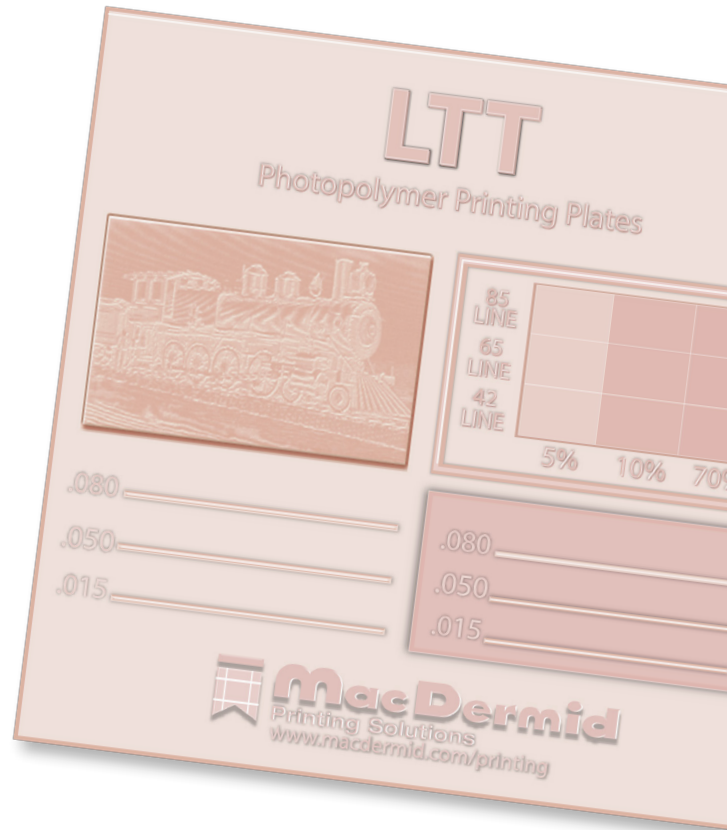

LTT

Liquid Photopolymer

Technical Specifications

LTT is packaged in 5-gallon (40 lbs., 18 kg., net wt.) containers. It is also available in 2200 lbs. (1000 kg.) totes.

Performance Specifications

Plate thickness:	0.045 - 0.125 in.
Background thickness:	0.020 - 0.090 in.
Relief Height:	0.025 - 0.035 in.
Tone range reproduction*:	2 - 95%
Line screen, max*:	120 lpi

*When used as a capped plate

Plate Processing

Hardness:	32 Shore A
Viscosity, 25°C:	32,000 cps
Appearance:	Red
Cloud point:	<32°F (0°C)
Freezing Point:	<32°F (0°C)
Temp. to thaw:	68°F (20°C)

Applications

LTT plates are designed for high-quality thin plate applications for direct printing on corrugated.

Processing

LTT plates are processed the same as other MacDermid liquid photopolymer printing plates, but require an additional light-finishing step in order to ensure tack-free properties. After the LTT plate has finished a ten minute post exposure step, it is placed into a dryer for 20-25 minutes at a temperature of 100-110°F (38-42°C).

The plate must be completely dry and warm when placed into the light-finishing unit, and must remain warm during the entire light-finishing step. The plate is exposed in the light-finishing unit (MacDermid Germicidal Unit) for 18-22 minutes at 100°F-110°F (38°C-42°C).

The MacDermid light-finishing unit is pre-heated to ensure that plates remain warm and proper detacking occurs during exposure. When using other plate finishers, exhaust from the unit should be minimized to maintain the plate temperature, and longer processing times may be needed.¹ This will aid in providing the best tack-free plate surface. Please consult with your MacDermid Technical Representative for appropriate procedures. Light-finishing units should be turned on 20 minutes prior to use each day to ensure the unit is warmed up. If the plate surface clouds or crazes after light-finishing, it may indicate that the plate has been exposed for too long. Reduce the amount of time in the light-finishing step. After completion of light-finishing, LTT plates are ready for the press.

¹Exhaust control may not be possible on non-MacDermid light-finishers. Check with the equipment manufacture. For customers using a MacDermid sheet photopolymer detack unit, the warm plate should be detacked for 35-45 minutes (bulb intensity should be > 600mj)



For more information, please contact:

USA 5210 Phillip Lee Drive Atlanta, GA 30336 Phone: 404.696.4565	Europe 3 rue de l'Industrie - BP 30160 68702 Cernay Cedex, France Phone: +33 (0) 3 89 38 43 12
--	--

www.macdermid.com/printing