

UVR

Photopolymer Plates



UVR
Photopolymer Printing Plates


175 LINE
150 LINE
130 LINE

2% 25% 50% 90%

.003
.004

12 PT.
8 PT.
6 PT.
4 PT.

Low Dot Gain
Excellent Resolution
Low Swell in UV Inks
Solvent or Thermal Processing

 **MacDermid**
GRAPHICS SOLUTIONS
www.macdermid.com/graphics

A Plate Designed Specifically for Use with UV Inks.





MacDermid's UVR was designed to swell less than other flexographic plates in aggressive UV inks. By their very nature, UV inks can affect flexo plate material more than solvent- or water-borne inks. UVR tends to swell less under these conditions, giving longer lifetime and more consistent print properties than plates with similar physical properties. Additionally, UVR offers excellent print resolution and low dot gain.

UVR can be processed in either solvent or thermal systems. When you need a plate with excellent resistance to UV inks, count on the company that innovates with you in mind. MacDermid.

KEY FEATURES

- Low Swell in UV inks
- Excellent Resolution
- Solvent or Thermal Processing
- Low Dot Gain

SEGMENTS

- Flexible Packaging 
- Tags and Labels 
- Folding Carton 
- Sacks, Paper, Multiwall 

UVR

Photopolymer Plates



TECHNICAL SPECIFICATIONS

LUX® ITP™ M is available in thicknesses of 0.045" (1.14 mm), 0.067" (1.70 mm), 0.100" (2.54 mm), 0.107" (2.72mm) and 0.112" (2.84mm) and in sizes up to 50" x 80" (1,320 mm x 2,032 mm). Please contact your MacDermid representative for details.

REPRODUCTION CAPABILITIES

Halftones: 0.045-0.067" gauge (1.14mm – 1.70 mm)
1 - 98% at 175 lpi (69 lines/cm)

Fine lines: 0.003 in. (0.075mm) width

Isolated dots: 0.006 in. (0.150 mm diameter)

Fine lines and isolated dots using 0.067 (1.70mm) plate

PLATE PROCESSING*

UVR can be processed in either solvent or thermal systems. For solvent processing, use with SOLVIT® M100 or SOLVIT® QD is recommended. Most other safe-solvent solutions may also be used.

Processing times for any particular job and process are determined by equipment and other factors; consult your MacDermid representative for help in optimizing your plate processing.


INK/SOLVENT COMPATIBILITY

UVR plates have ink compatibility similar to natural rubber. Plates are compatible with water and alcohol based inks containing up to 25% acetate, and with most commercial UV inks. UVR is not recommended for oil-based inks, hydrocarbon solvents, or inks with acetate content higher than 25%.

APPLICATIONS

UVR is a digital sheet photopolymer for use in labels, folding carton, flexible packaging and other flexo markets that require a medium-high durometer plate, in particular one with good swell resistance to UV inks.

SWELL, BY WEIGHT %

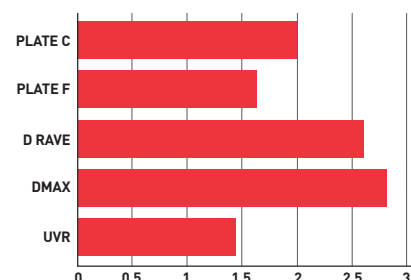

RECOMMENDED PROCESSING CONDITIONS*

GAUGE	DUROMETER	DESIRED RELIEF	BACK EXPOSURE ^{1,2}		FACE EXPOSURE ²		WASH OUT ³	DRY TIME	POST EXPOSURE ³	DETACK ⁴
(mil/mm)	(Shore A)	(mil/mm)	(mJ/cm ²)	(sec)	(J/cm ²)	(sec)	(sec)	(min)	(min)	(min)
45/1.14	77	20/0.5	1.2	75	5.2-7.9	330-490	180	90	5	8-10
67/1.70	70	20/0.5	2.4	150	5.2-7.9	330-490	360	120	5	8-10

*Contact your MacDermid representative for assistance in establishing proper processing conditions

1. Lamp intensity: 16 mW/cm²
2. Solvit QD washout times
3. Lamp intensity: 17mW/cm²
4. Lamp intensity: 10 mW/cm²



©2016 MacDermid, Inc. All rights reserved.

FOR MORE INFORMATION, PLEASE CONTACT:

USA
5210 Phillip Lee Drive
Atlanta, GA 30336
P 404.696.4565

EUROPE
3 rue de l'Industrie - BP 30160
68702 Cernay Cedex, France
P +33 (0) 3 89 38 43 12

macdermid.com/graphics